



Accessory



ZB-Pro 2.4GHz Zigbee Network
Management Tool

RTI Control System



ZM-24 2.4GHz Transceiver Module

The ZM-24 transceiver module provides bi-directional communication between two-way enabled RTI remote controls and control processors utilizing Zigbee® wireless communication. Capable of being configured in two different modes, the ZM-24 can be hard-wired directly to a control processor or be used as a wireless repeater device to create an ultra-reliable, wireless network.

Utilizing the latest in wireless technology, the ZM-24 2.4GHz Transceiver Module is capable of more than just receiving signals - it can transmit signals as well. This creates a bi-directional communication link between Zigbee® enabled RTI control processors and handheld remote controls. Feedback, such as song meta-data or volume level from supported devices can now be viewed on the remote control.

The ZM-24 is easy to install, since only one module needs to be hard-wired to the control processor. This device becomes the “coordinator”, while additional “repeater” modules can be added by simply powering them from any electrical outlet within communication range of other modules. The ZM-24 units will then create a wireless network which adapts to changes or problems with the communication path.

Key Features


- Enables bi-directional Zigbee® communication.
- Wireless Zigbee® communication range between ZM-24 modules up to 100 feet.
- Connects to a central processor from up to 1000 feet away using standard Cat5 cable.
- Can be connected directly to compatible RTI control processors or create a wireless network by adding modules configured in “repeater” mode.
- Utilizes IEEE802.15.4 wireless Zigbee® communication at 2.4Ghz.
- Durable plastic enclosure and adjustable antenna.
- Receives power from an RTI control processor or from the included power supply.
- Easy mounting with a detachable wall bracket.

Specifications

Power.....+9VDC to +16VDC, 60mA
 RTI Com Port..... Two-way Zigbee® Communication Port, RJ45 Connection
 Drives up to 1000 ft (300 m) of wire
 Wireless Networking..... IEEE802.15.4 Zigbee® network compliant
 RF Frequency Range 2.4Ghz - 2.5Ghz
 Operating Temperature..... +32°F to +122°F (0°C to +50°C)
 Operating Humidity..... 5% to 95% Non-condensing
 Device Capability..... Total number of devices is limited only by memory
 Communications..... OTA (Over-the-air) Programmable
 Enclosure..... High-impact molded ABS plastic, black
 Mounting..... Detachable bracket
 Dimensions - Antenna Flat (WxHxD)..... 3.5" (89mm) x 4.0" (101mm) x 1.1" (28mm)
 Dimensions - Antenna Extend. (WxHxD).. 3.5" (89mm) x 7.25" (184mm) x 1.1" (28mm)
 Weight 4 oz (113g)
 Warranty..... Three Year (Parts & Labor)

All specifications subject to change without notice

Installation Diagram

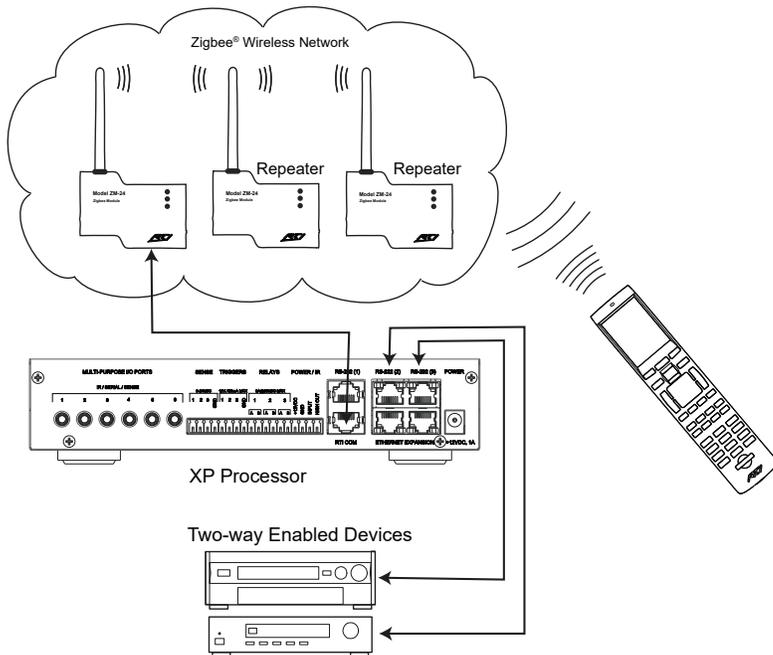

RTI User Interfaces

Remote Controls
 Keypads
 Audio Control Keypads
 In-Wall Touchpanels
 Tabletop Touchpanels
 Mobile Apps



RTI Control Accessories

Control Processors
 System Kits
 RS-232 Modules
 IR Modules
 Relay Modules
 Z-Wave Modules



RTI Audio/Video Distribution

HDMI Splitters & Switches
 HDMI Matrix Switches
 HDBaseT Matrix Switches
 HDBaseT Extenders
 Presentation Switches
 Video over IP Transceivers



Remote Technologies Incorporated
 5775 12th Avenue East, Suite 180, Shakopee, MN 55379
 PH: (952) 253-3100 • Website: www.rticorp.com

RTI
 It's Under Control®