

FCC Compliance Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the Federal Communications Commission (FCC) Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the device. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference.
2. This device must accept any interference received including interference that may cause undesired operation.

Industry Canada Compliance Statement

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions:

1. This device may not cause harmful interference.
 2. This device must accept any interference received including interference that may cause undesired operation.
- Cet appareil est conforme avec Industrie Canada exempts de licence standard RSS (s). Son fonctionnement est soumis aux deux conditions suivantes:
1. Ce dispositif ne peut causer des interférences nuisibles.
 2. Cet appareil doit accepter toute interférence reçue y compris des interférences qui peuvent provoquer un fonctionnement indésirable.



DECLARATION OF CONFORMITY (DOC)

The Declaration of Conformity for this product can be found on the RTI website. (www.rticorp.com/declaration)

Safety Suggestions

Read and Follow Instructions. Read all safety and operating instructions before operating the unit.

Retain Instructions. Keep the safety and operating instructions for future reference.

Heed Warnings. Adhere to all warnings on the unit and in the operating instructions.

Heat. Keep the unit away from heat sources such as radiators, heat registers, stoves, etc., including amplifiers that produce heat.

Power Sources. Use only power sources of the type described in the operating instructions, or as marked on the unit.

Water and Moisture. Do not use the unit near water—for example, near a sink, in a wet basement, near a swimming pool, near an open window, etc.

Object and Liquid Entry. Do not allow objects to fall or liquids to be spilled into the enclosure through openings.

Servicing. Do not attempt any service beyond that described in the operating instructions. Refer all other service needs to qualified service personnel.

Damage Requiring Service. The unit should be serviced by qualified service personnel when:

- Objects have fallen or liquid has been spilled into the unit.
- The unit has been exposed to rain.
- The unit does not appear to operate normally or exhibits a marked change in performance.
- The unit has been dropped or the enclosure has been damaged.

Limited Warranty

RTI warrants new products for a period of three (3) years from the date of purchase by the original purchaser (end user) directly from RTI / Pro Control (herein referred to as "RTI"), or an authorized RTI dealer. Warranty claims may be initiated by an authorized RTI dealer using the original dated sales receipt or other proof of warranty coverage. In the absence of the receipt of purchase from the original dealer, RTI will provide warranty coverage extension of six (6) months from the date code of the product. Note: RTI warranty is limited to the provisions set forth in this policy and does not preclude any other warranties offered by third parties who are solely responsible for those other warranties.

Except as specified below, this warranty covers defects in product material and workmanship. The following are not covered by the warranty:

- Damages caused by accident, misuse, abuse, neglect or acts of God.
- Cosmetic damage, including, but not limited to, scratches, dents and normal wear and tear.
- Failure to follow instructions contained in the Product Installation Guide.
- Damages due to products used in an application or environment other than that for which it was intended, improper installation procedures or adverse environmental factors such as incorrect line voltages, improper wiring, or insufficient ventilation.
- Repair or attempted repair by anyone other than RTI and Pro Control or authorized service partners.
- Failure to perform recommended periodic maintenance.
- Causes other than product defects, including lack of skill, competence or experience of user.
- Damage due to shipment of this product (claims must be made to the carrier).
- Altered unit or altered serial number: defaced, modified or removed.

RTI is also not liable for:

- Damages caused by its products or for failure of its products to perform, including any labor costs, lost profits, lost savings, incidental damages, or consequential damages.
- Damages based upon inconvenience, loss of use of the product, loss of time, interrupted operation, commercial loss, any claim made by a third party or made on behalf of a third party.
- Loss of, or damage to, data, computer systems or computer programs.

RTI's liability for any defective product is limited to repair or replacement of the product, at the sole discretion of RTI.

In cases where the warranty policy conflicts with local laws, the local laws will be adopted.

Contacting RTI

For news about the latest updates, new product information, and new accessories, please visit our web site at: www.rticorp.com

For general information, contact RTI at:
Remote Technologies Incorporated
5775 12th Ave. E Suite 180
Shakopee, MN 55379
Tel. (952) 253-3100
Fax (952) 253-3131
info@rticorp.com

Service & Support

If you are encountering any problems or have a question about your RTI product, please contact RTI Technical Support for assistance (see the Contacting RTI section of this guide for contact details). RTI provides technical support by telephone or e-mail. For the highest quality service, please have the following information ready, or provide it in your e-mail.

- Your Name
- Company Name
- Telephone Number
- E-mail Address
- Product model and serial number (if applicable)

If you are having a problem with hardware, please note the equipment in your system, a description of the problem, and any troubleshooting you have already tried.

Please do not return products to RTI without a return authorization.



VDX-14x

1x4 HDBaseT Splitter

Reference Guide



Perfect for sports bars, lobbies and retail spaces, the VDX-14x HDBaseT Splitter allows a single video source to be simultaneously distributed to four displays. Utilizing the HDBaseT™ technology, 1080p video content can be delivered up to 230 feet (70m) and 4K video up to 131 feet (40m), to a VHR-1x receiver (*sold separately*).


Key Features

The VDX-14x provides superior quality and reliability as well as these specific features:

- Extends HDMI up to 230ft (70m) for 1080p or 131ft (40m) for 4K, over single CAT5e/6/7 cable.
- Supports all known HDMI audio formats including Dolby TrueHD, Dolby Atmos, Dolby Digital Plus and DTS-HD Master Audio transmission
- Supports PoH (Power over HDBaseT) to power compatible receivers (not included)
- Compact design and rack mountable
- 1x HDMI input that is distributed to 4x HDBaseT outputs
- Supports 1080p and 4K video and HDCP 2.2 compliant
- Automatic EDID support
- Web based management and remote monitoring support
- One way IR support

Installation & Operation


VDX-14x DESCRIPTION

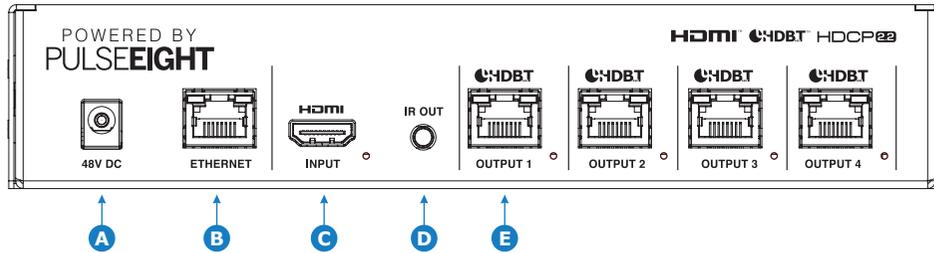

No.	Name	Function
A	Power	Connect the power supply (Included)
B	Ethernet	Connect a standard Ethernet cable from your router or network switch. NOTE: Cross over cables are not supported
C	HDMI Input	Connect your source device into the HDMI input port using a High Speed HDMI cable (not supplied)
D	Infrared Output	IR Emitter is to be plugged into this port
E	HDBaseT Outputs	Display devices are connected via category cable (Cat5e/6/7) from the Output port to a VHR-1x receiver (sold separately)

VIDEO SOURCE CONTROL


An RTI control system may be used for control of the video source and displays. In addition, IR control of the video source may be sent to an infrared receiver and passed through the VHR-1x HDBaseT receiver. This signal will be delivered over the category cable to the VDX-14x. Plug an IR Emitter into the IR Out port and mount it over the source's IR window.

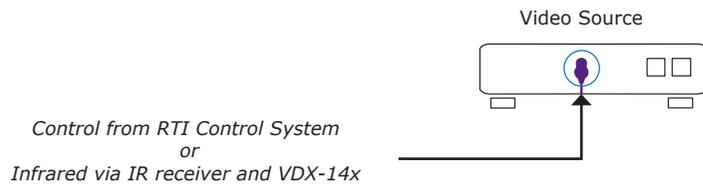

INITIAL SETUP

- Connect an HDMI cable between Splitter's "HDMI Input" and Display Device.
- Connect a CAT5e/6/7 cable between the HDBaseT outputs and a VHR-1x Receiver (not included) finish the connection using a HDMI cable between the HDBaseT receiver and Video Source
- Connect the supplied IR Emitter to the IR Out port of VDX-14x or to RTI control processor, and place the other end over the source's IR sensor window (as per above diagram)
- Plug in power jack to "DC 48VDC" port.
- Power on power adapter.

Connection Diagram

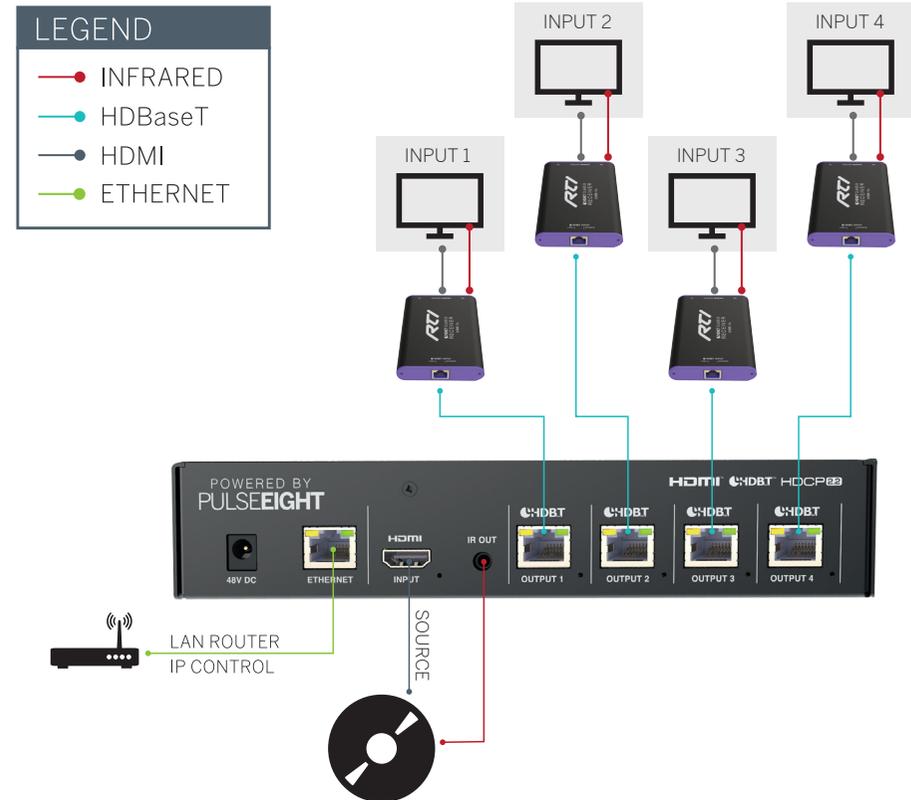

*VHR-1x Receiver (sold separately)

Product Contents

Contents within the box include the following items:

- VDX-14x HDBaseT Class B (Lite) Splitter
- Power Supply (48VDC)
- Rack Mounting Kit
- Reference Guide

Requires VHR-1x Receivers (sold separately)