




## KA11 - 11" Countertop/ On-Wall Touchpanel

The KA11 touchpanel provides simple, intuitive control of the entertainment, environment and security systems in residential or commercial settings. The sleek touchpanel features a fully customizable 11.6" widescreen LCD display with an integrated capacitive touchscreen for swiping through pages and menus. The innovative KA11 is programmable in landscape or portrait mode and comes equipped with sensors to automatically wake the unit and adjust the screen brightness as a user approaches.

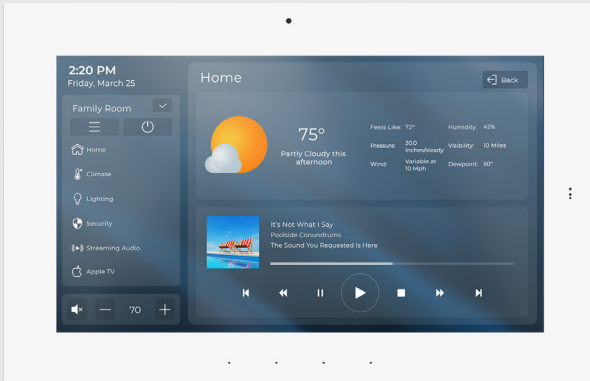

Installation is easy using the included wall bracket or an accessory stand is available for table top installations. In addition, only one Ethernet connected Cat-5/6 cable is required to power the unit and enable control via the RTI ecosystem.

### Installation Options



### Key Features

- 11.6" widescreen LCD with 1920x1080 Full HD resolution and integrated capacitive touchscreen, supporting multi-touch and gesture.
  - Fully customizable interface can be programmed in portrait or landscape mode.
  - Innovative design allows wall mount in dual gang electrical box or table top installation using stand accessory (sold separately).
  - Ambient light and proximity sensor adjusts the screen brightness and LED backlights automatically according to the environmental light level.
  - Powered by PoE (Power over Ethernet) or a power supply (sold separately).
  - Gigabit Ethernet with PoE enables two-way control via the RTI control system, video from IP security cameras, and remote programming updates.
  - Video intercom capability with built in camera, microphone and speakers (future use)\*.
- \* Intercom functionality will be enabled with a future firmware update.

### Included in the Box

KA11, mounting bracket (1), mounting screws (4), 2-gang low voltage bracket (1)

The Tabletop Stand is sold separately

## Specifications

Power (Power Supply not included) ..... +24V DC, 1A  
 ..... or PoE (802.3af)

Power Management .....Adjustable backlight/  
 .....proximity sensor

Touchscreen Display..... High-brightness color IPS LCD  
 .....Full HD (1920x1080 pixels) with 16.7M colors  
 .....Integrated high-resolution projected capacitive touchscreen

Display Size..... 11.6 in (294 mm) diagonal

Display Backlight ..... LED Backlit, 350nit

Ethernet Port.....RJ-45, 10/100/1000 Base-T  
 ..... with Power-over-Ethernet

Camera.....Color CMOS, 8MP, 30FPS

Microphone.....Built-in Microphone, Echo cancellation  
 .....and noise suppression. Voice activity detection

Speakers ..... Two (2), Stereo 2 Watt

Communications ..... USB programming port

System Memory..... 2GB DDR3, 8GB eMMC Flash

Device Capability ..... Total number of devices  
 ..... is limited only by memory

Macro Capability..... Total number of macros is  
 .....limited only by memory

Operating Temperature ..... +32°F to +122°F (0°C to +50°C)

Operating Humidity ..... 5% to 95% Non-condensing

Mounting ..... Tabletop with Aluminum Stand or Wall-Mount

Installation ..... US standard 2 gang,  
 ..... Low voltage bracket (included)

Outer Bezel Dimension (W x H)..... 12.4 in x 7.9 in  
 ..... 313 mm x 201 mm


Depth in Wall..... 0.83 in (21mm)

Weight ..... 1.78 lb (807g)

Warranty ..... Three Years (Parts & Labor)

All Specifications subject to change without notice.

## Features

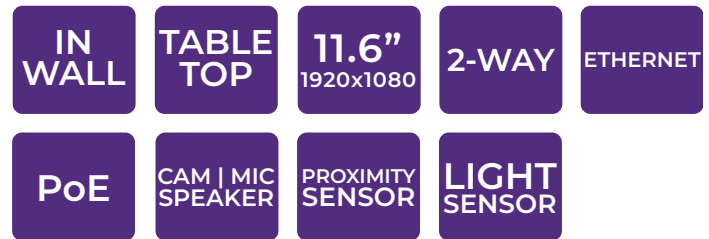

The Tabletop Stand is sold separately

## Do more with Integration Designer 11

Integration Designer 11 elevates the experience for all RTI systems, from residential to commercial. Its stunning new template - complete with custom slider support, one-click background swapping and more - makes it faster than ever to deliver a beautiful finish to every installation. Drivers are directly accessible from within the software, with notifications to keep you always up to date. The integrated system manager lets you track rooms, rooms status, and source status to save time on every installation. All this and more in [Integration Designer 11](#).

